


uOLED-96-G2

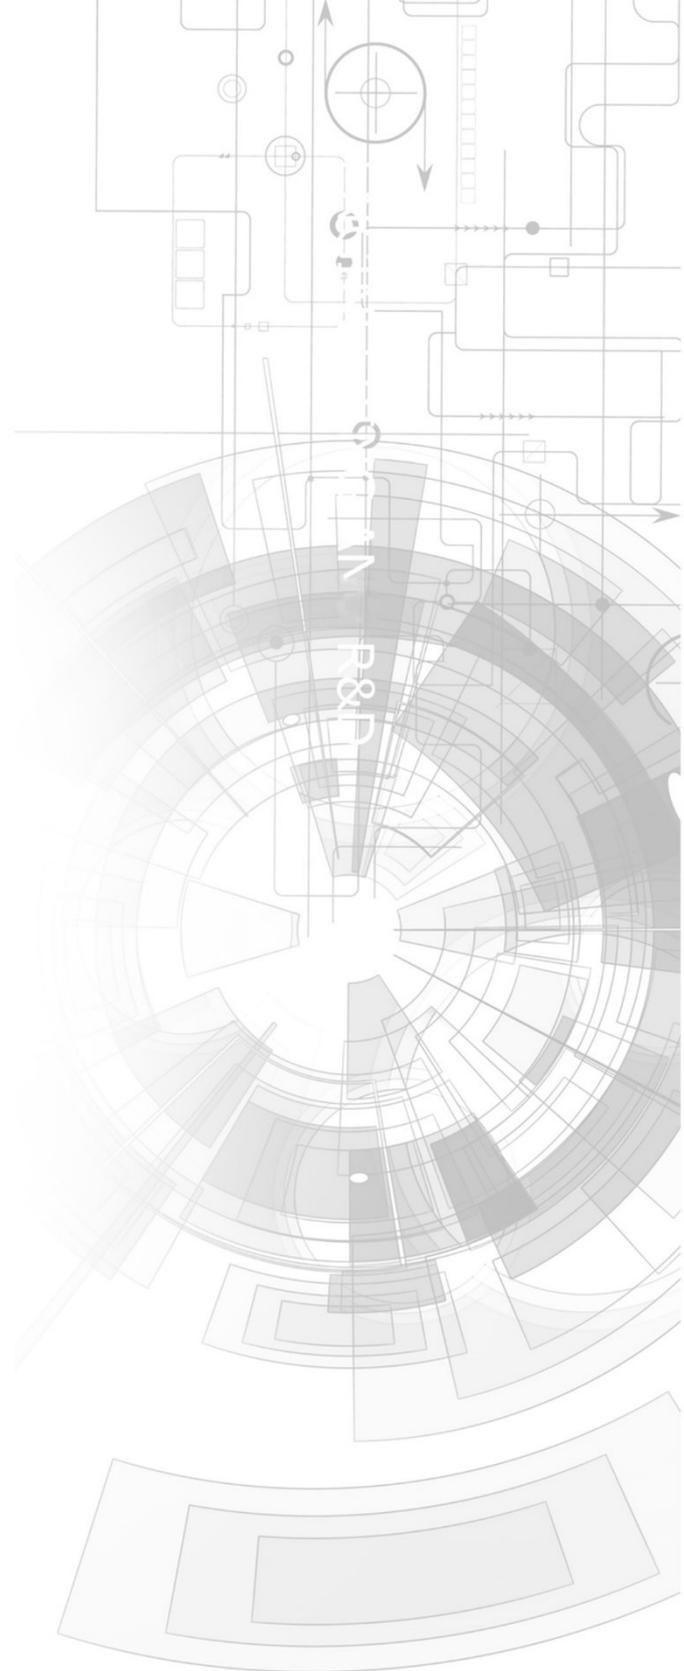

Datasheet

Revision 1.7

Copyright © 2024 4D Systems

Content may change at any time. Please refer to the resource centre for latest documentation.

Contents

1. Description	3
2. Features	0
3. Pin Configuration and Summary	0
4. Hardware Interface - Pins	0
5. Serial Ports - COM0 UART	0
6. General Purpose I/O	0
6.1. System Pins	0
7. Module Features	0
7.1. Display - 0.96" PMOLED	0
7.2. GOLDELOX Processor	0
7.3. SD/SDHC Memory Cards	0
8. OLED Screen Precautions	0
9. Hardware Tools	0
9.1. 4D Programming Cable/Adaptor	0
10. Programming Language	0
11. Workshop4 IDE	0
11.1. PmmC/Firmware Programming	0
12. Display Module Part Numbers	0
13. Starter Kit	0
14. Mechanical Details	0
15. Schematic Diagram - REV 5.0	0
16. Specifications	0
17. Revision History	0
18. Legal Notice	0
18.1. Proprietary Information	0
18.2. Disclaimer of Warranties & Limitations of Liabilities	0

1. Description

The uOLED-96G2 is an impressive OLED display module in the 4D Systems micro OLED graphics display range. Combining a resolution of 0.96" 96x64 pixels with 65K True-to-Life colours, this display module is perfect for animations, slideshows and other multimedia presentations. It is the ideal size for attractive embedded display applications.

This module is a compact and cost-effective Intelligent Display Module using the latest state-of-the-art Passive Matrix OLED (PMOLED) technology. Driving the module and its peripherals is the GOLDELOX processor, a very capable chip that provides impressive graphics power, programmed with 4D Systems Workshop IDE Software.

4D Systems Workshop enables graphic solutions to be constructed rapidly and with ease due to its design being solely for 4D graphics controllers.

The uOLED-96G2 has a modest but comprehensive range of features suited for an application requiring a bright eye-catching display, an analog input, Dallas 1-wire sensor capability, audio generation, or simply digital I/O. This is truly an impressive little module.

